








LINEAR IndiviLED® Sensor


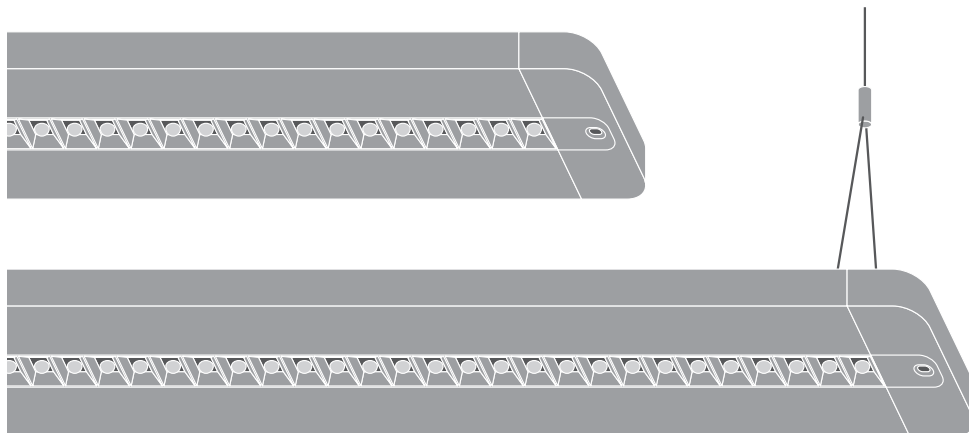


	EAN	l x w x h [mm]	W	lm	lm/W	K	IP	IK
LN INDV D 1200 34W/3000K S	4058075109285	1229x120x40	34	3800	110	3000	20	06
LN INDV D 1200 34W/4000K S	4058075109308	1229x120x40	34	4200	120	4000	20	06
LN INDV D 1500 25W/3000K S	4058075109322	1518x120x40	25	3100	125	3000	20	06
LN INDV D 1500 25W/4000K S	4058075109360	1518x120x40	25	3300	125	4000	20	06
LN INDV D 1500 48W/3000K S	4058075109384	1518x120x40	48	5300	110	3000	20	06
LN INDV D 1500 48W/4000K S	4058075109407	1518x120x40	48	5700	120	4000	20	06
LN INDV D/I 1200 42W/3000K S	4058075109445	1229x120x40	42 (= 34+8)	4650 (= 3800+850)	110	3000	20	06
LN INDV D/I 1200 42W/4000K S	4058075109469	1229x120x40	42 (= 34+8)	5050 (= 4200+850)	120	4000	20	06
LN INDV D/I 1500 56W/3000K S	4058075109483	1518x120x40	56 (= 48+8)	6150 (= 5300+850)	110	3000	20	06
LN INDV D/I 1500 56W/4000K S	4058075109506	1518x120x40	56 (= 48+8)	6550 (= 5700+850)	115	4000	20	06

	EAN	θ _{amb} (°C)	V _{AC}	Hz	∇	PF	R _a	👤
LN INDV D 1200 34W/3000K S	4058075109285	-20...+45	220-240V	50/60 Hz	70°	> 0.9	> 80	2.5 kg
LN INDV D 1200 34W/4000K S	4058075109308	-20...+45	220-240V	50/60 Hz	70°	> 0.9	> 80	2.5 kg
LN INDV D 1500 25W/3000K S	4058075109322	-20...+45	220-240V	50/60 Hz	70°	> 0.9	> 80	3.0 kg
LN INDV D 1500 25W/4000K S	4058075109360	-20...+45	220-240V	50/60 Hz	70°	> 0.9	> 80	3.0 kg
LN INDV D 1500 48W/3000K S	4058075109384	-20...+45	220-240V	50/60 Hz	70°	> 0.9	> 80	3.2 kg
LN INDV D 1500 48W/4000K S	4058075109407	-20...+45	220-240V	50/60 Hz	70°	> 0.9	> 80	3.2 kg
LN INDV D/I 1200 42W/3000K S	4058075109445	-20...+45	220-240V	50/60 Hz	70° + 120°	> 0.9	> 80	2.7 kg
LN INDV D/I 1200 42W/4000K S	4058075109469	-20...+45	220-240V	50/60 Hz	70° + 120°	> 0.9	> 80	2.7 kg
LN INDV D/I 1500 56W/3000K S	4058075109483	-20...+45	220-240V	50/60 Hz	70° + 120°	> 0.9	> 80	3.3 kg
LN INDV D/I 1500 56W/4000K S	4058075109506	-20...+45	220-240V	50/60 Hz	70° + 120°	> 0.9	> 80	3.3 kg

LINEAR IndiviLED® DIRECT

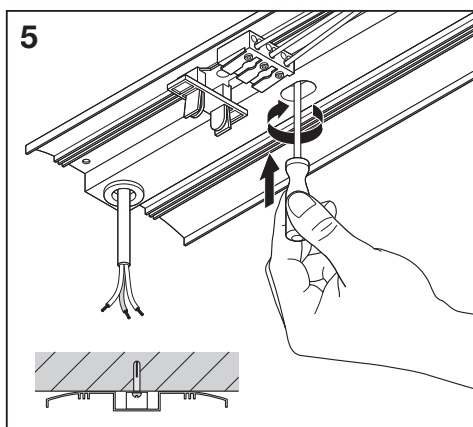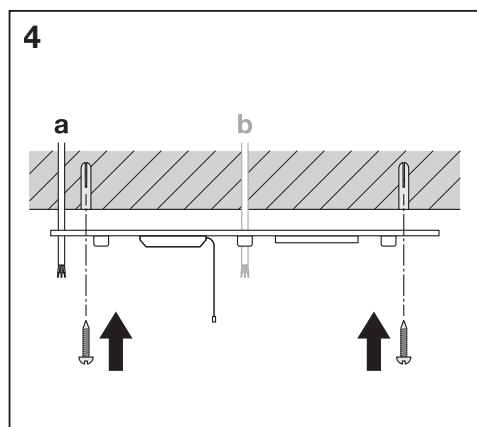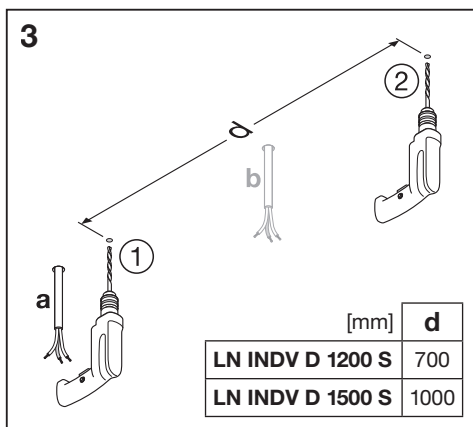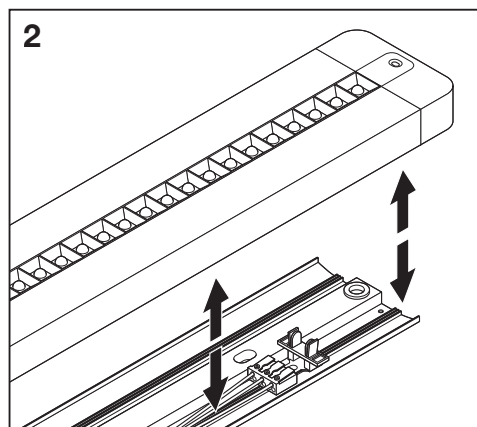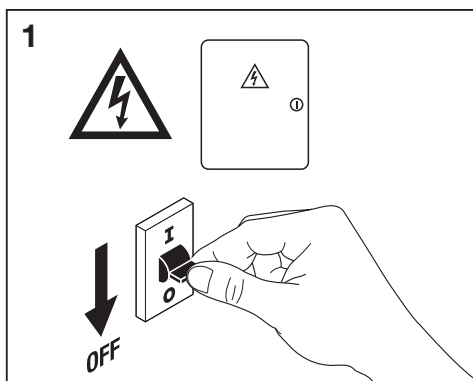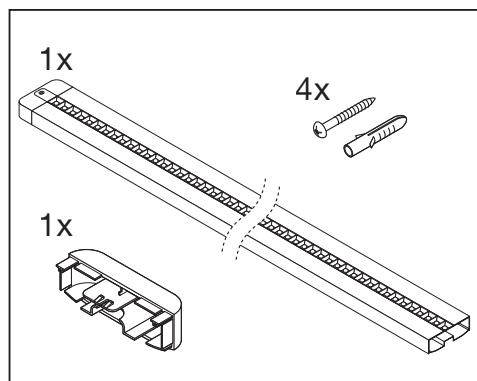

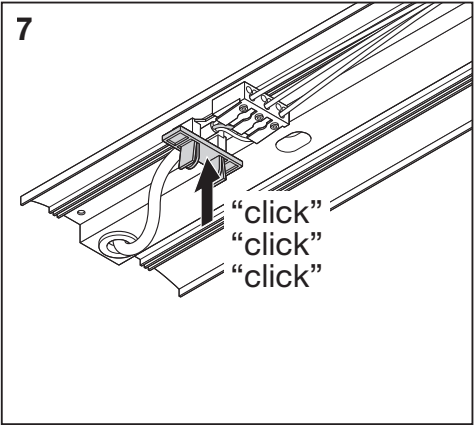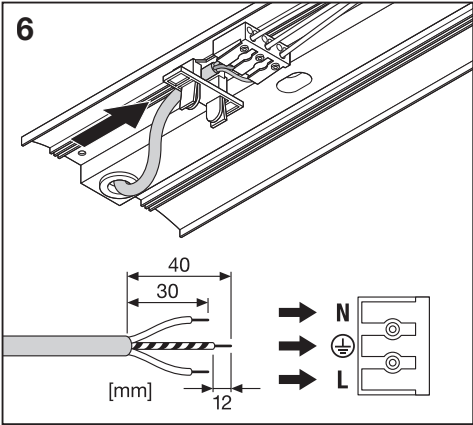

8

-4.24dBm / 5725-5875MHz

2m ≤ h ≤ 6m

d

d = 14m @ Detection Area = 100 %
d = 8m @ Detection Area = 50 %

ON OFF

1 2 3 4

1 2 3 4

Detection Area







1		
ON	100 %	
-	50 %	

Hold Time

2	3	
ON	ON	5 s
ON	-	1 min
-	ON	3 min
-	-	10 min






Daylight Sensor


4	
ON	25 LUX
-	Disable

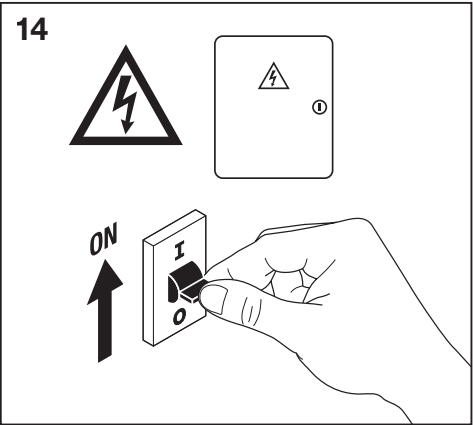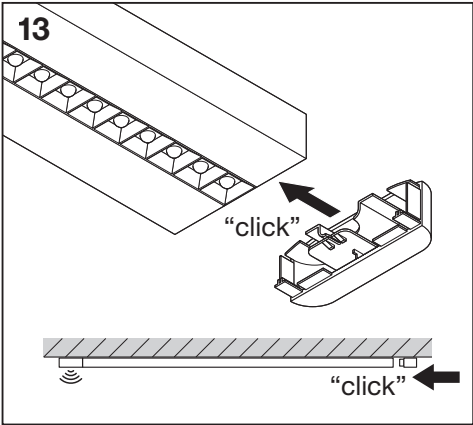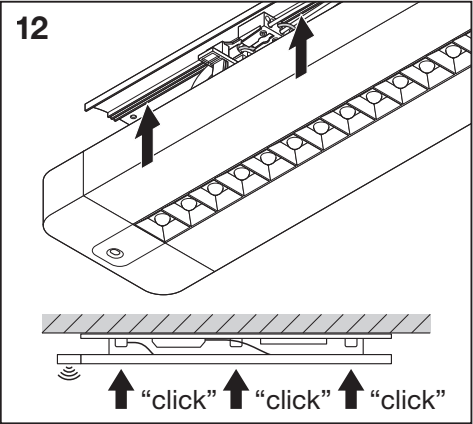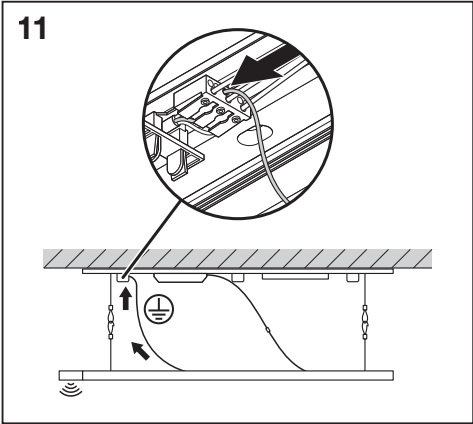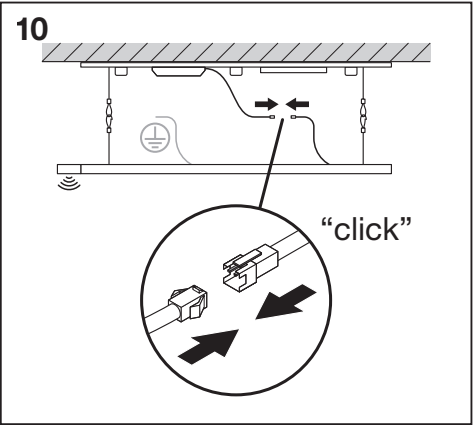
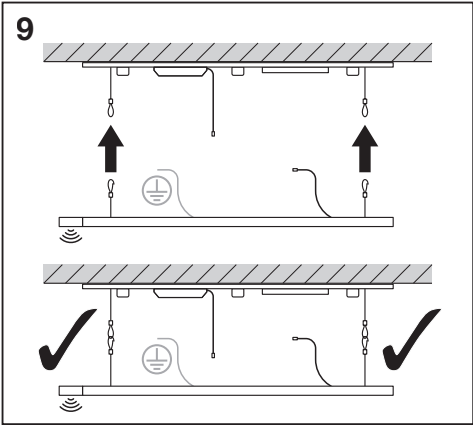


LINEAR IndiviLED® DIRECT | DIRECT/INDIRECT

LN INDV SUSPENSION KIT
EAN 4058075133280

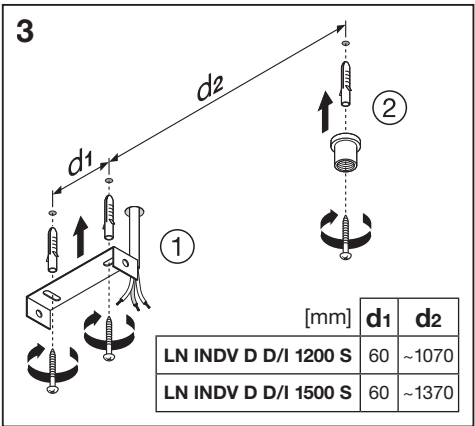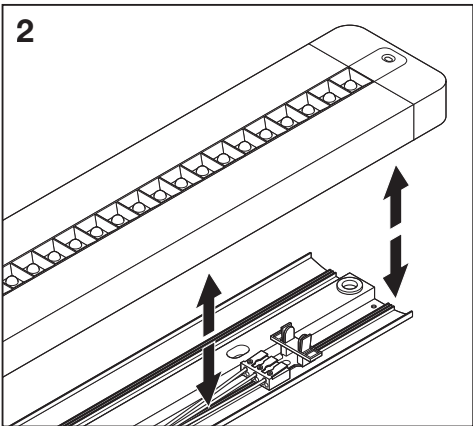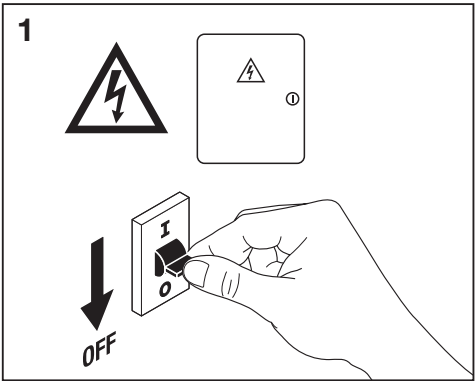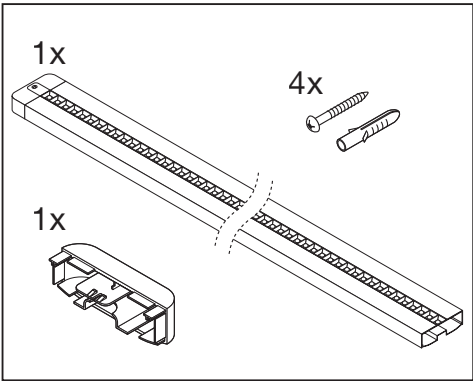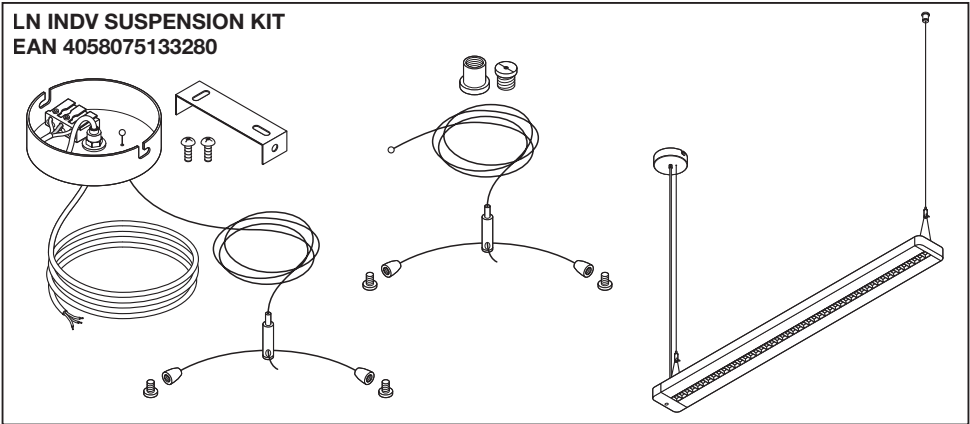

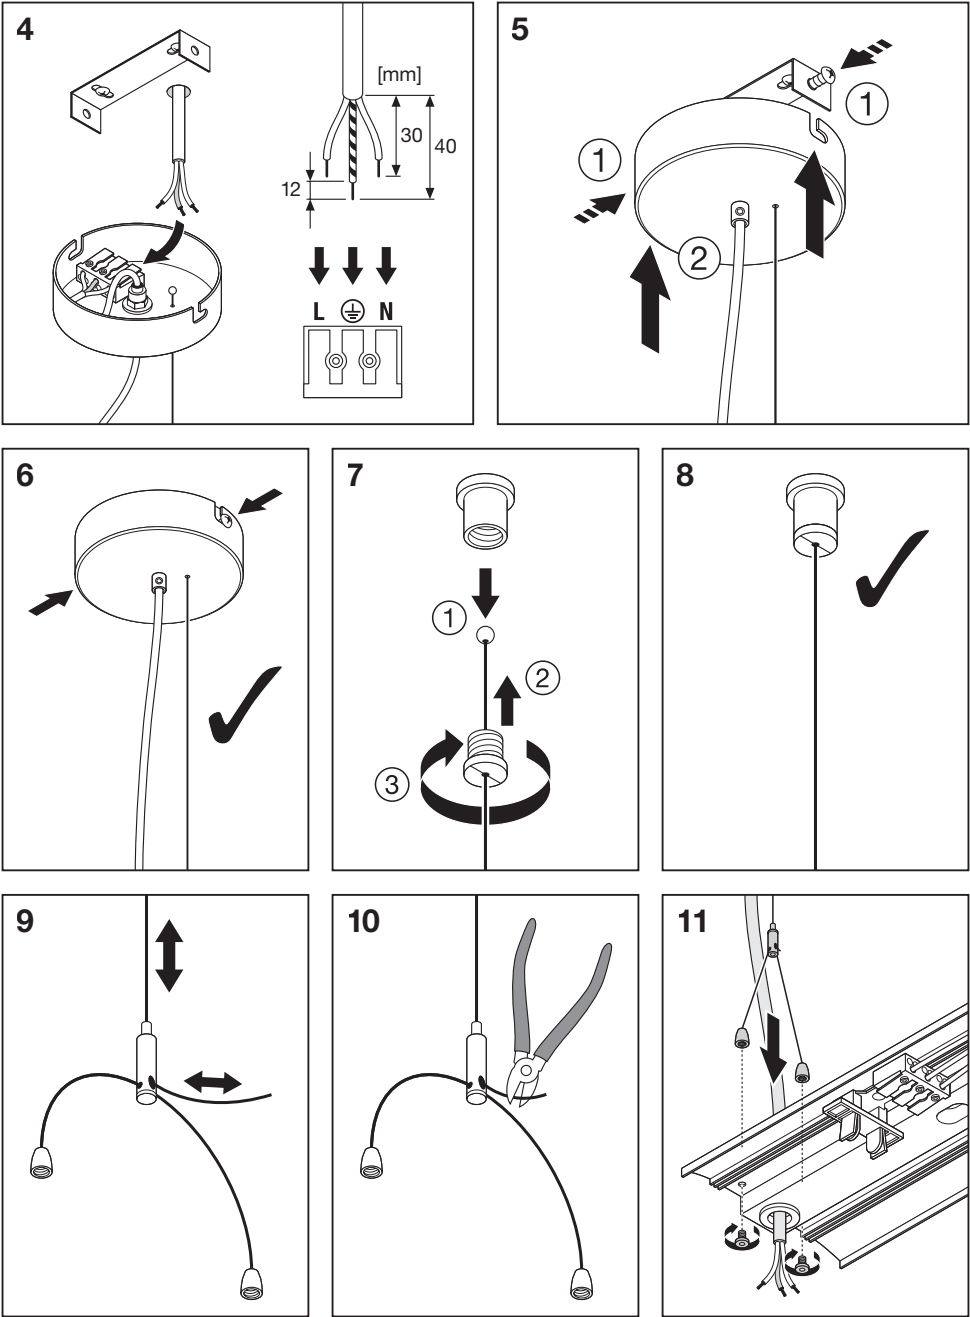

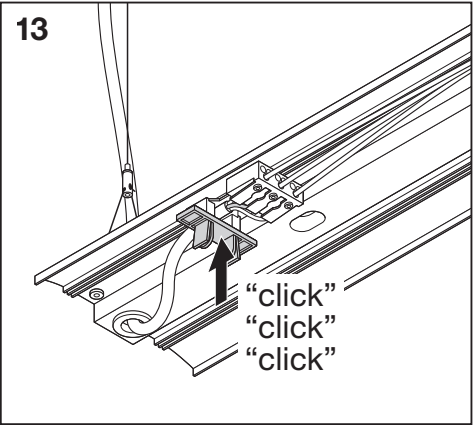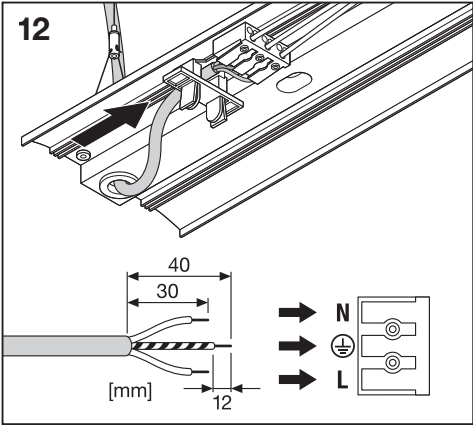

14

-4.24dBm / 5725-5875MHz

$2\text{m} \leq h \leq 6\text{m}$

d

d = 14m @ Detection Area = 100 %
d = 8m @ Detection Area = 50 %

ON OFF

1 2 3 4

1 2 3 4

Detection Area







1		
ON	100 %	
-	50 %	

Hold Time

2	3	
ON	ON	5 s
ON	-	1 min
-	ON	3 min
-	-	10 min

Daylight Sensor

4	
ON	25 LUX
-	Disable

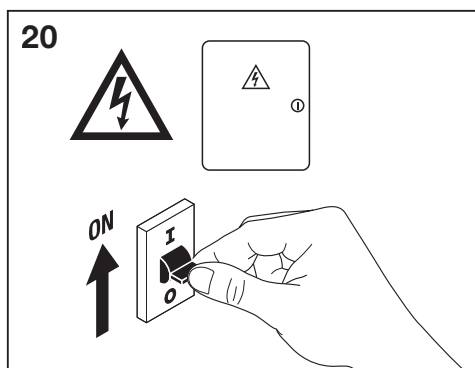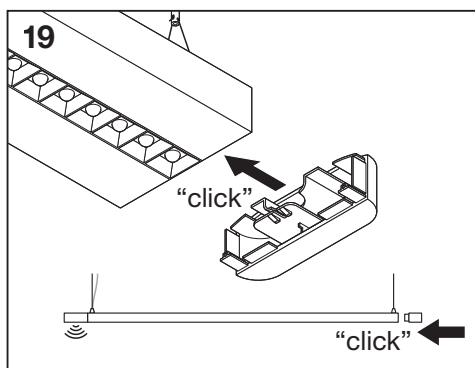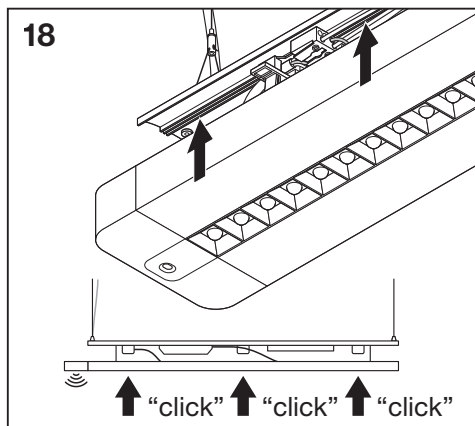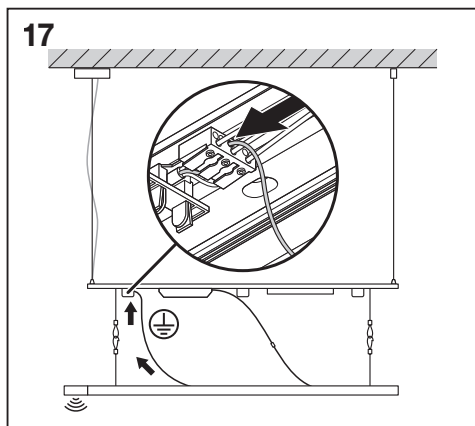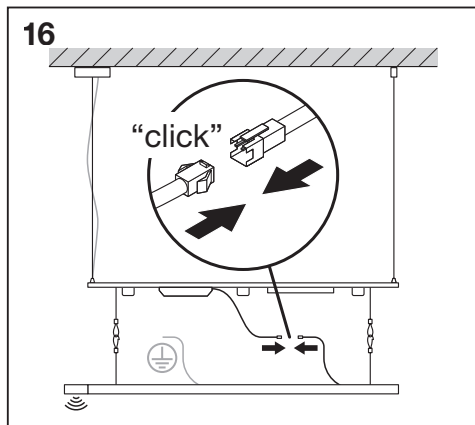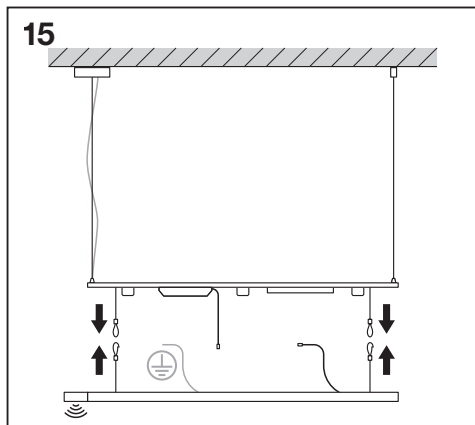

CE   EAC RoHS



C10449058
G11041349
31.10.18



LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com