

PRODUCT DATASHEET

PL FLEX 625 DALI S 32W 840 U19

PANEL FLEX 625 UGR<19 DALI | Square recessed panel luminaire with low glare, for 625 x 625 mm ceiling systems and DALI-2 technology



Areas of application

- Suitable for recessed ceiling systems with grid size of 625 x 625 mm
- Direct replacement for recessed luminaires with fluorescent lamps
- Offices, conference rooms
- Reception areas, foyers, corridors, elevators

Product benefits

- Suitable luminaire for VIVARES and other DALI-2 Light Management Systems
- High lumen output with up to 5220 lm
- Energy savings thanks to high system efficacy: up to 160 lm/W
- Good glare reduction ($UGR \leq 19$)
- High color consistency with SDCM 3
- External driver for extended flexibility and easy installation
- Low flicker light thanks to special electronic control gear
- Tool-free electrical connection due to push button connector
- Through-wiring possible with included connector box
- Decentral emergency lighting possible with separately available LEDVANCE Emergency Conversion Box
- Extended services such as energy monitoring and remote maintenance possible with DALI versions
- 7 years guarantee

Product features



- IoT-ready luminaire with DALI-2 technology
- Suitable for central battery emergency installations acc. to EN 60598-2-22
- Lifetime (L80/B10): 100,000 h (at 25 °C), (L90/B10): 50,000 h (at 25 °C)
- 5-pole terminal block, cable cross section up to 5 x 2.5 mm²
- Extruded aluminum frame, metal housing
- Polystyrene diffuser

TECHNICAL DATA

Electrical data


Nominal wattage	32.00 W ¹⁾
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	150.000 mA
Inrush current	4,4 A
Inrush current time T _{h50}	440 µs
Max. number of luminaires per miniature circuit breaker B16	40
Max. number of luminaires per miniature circuit breaker C10	41
Max. number of luminaires per miniature circuit breaker C16	66
Power factor λ	> 0.90
Total harmonic distortion	< 15 %
Protection class	II
Operating mode	External LED driver
Dimming interface	DALI-2 / IoT

¹⁾ The Panel Flex family is fulfilling the technical minimum requirements according to the German BEG subsidy program for energy efficient luminaires


Photometrical data

Luminous flux	5220 lm ¹⁾
Luminous efficacy	160 lm/W ¹⁾
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	> 80
Standard deviation of color matching	≤3 sdcn
Low flicker	Yes
Flickering metric (Pst LM)	<1
Stroboscope effect metric (SVM)	<0.4
Photobiological safety group acc. to EN62778	RG0
Beam angle	90 °
UGR	< 19

¹⁾ The Panel Flex family is fulfilling the technical minimum requirements according to the German BEG subsidy program for energy efficient luminaires

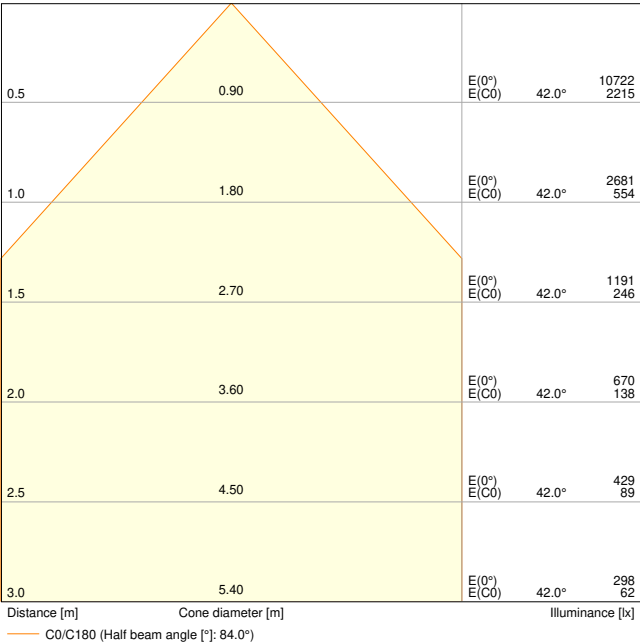


PL FLEX DALI 625 S 32W 4000K U19 5220lm

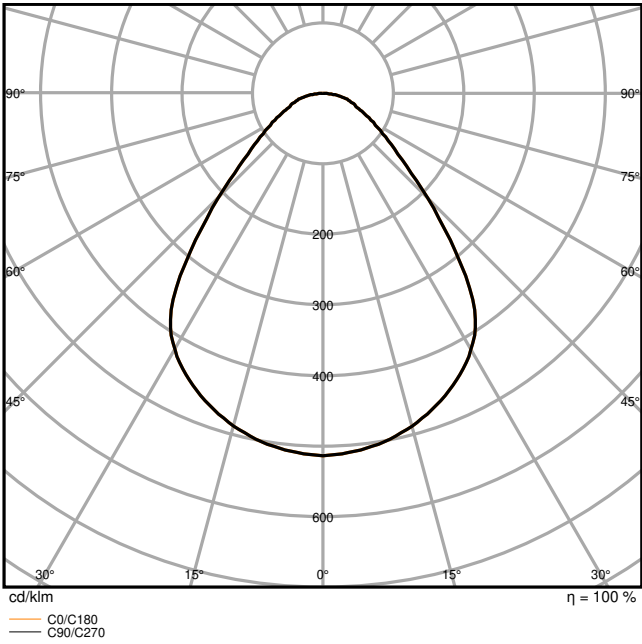

PL FLEX DALI 625 S 32W 4000K U19 5220lm

Dimensions & Weight

Length	620.00 mm
Width	620.00 mm
Height	32.00 mm
Product weight	1700.00 g

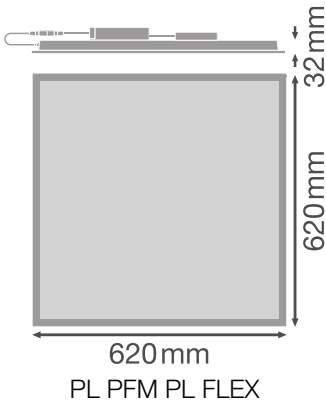

Materials & Colors

Product color	White
---------------	-------

Housing color	White
Body material	Aluminum
Cover material	Polystyrene (PS)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-10...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	Screwless terminal, 5-Pole (L, N, PE, DA+, DA-)
Type of protection	IP40/IP20
Protection class IK (shock resistance)	IK02
Dimmable	Yes
Type of dimming	DALI2
Mounting type	Recessed/Suspended/Surface
Mounting location	Ceiling
Application environment	Indoor
Mounting length	620 mm
Mounting width	620 mm
Mounting depth	50 mm
Adjustable	No
With light source	Yes
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	100000 h ¹⁾
Lifespan L80/B10 at 25 °C	100000 h ¹⁾
Lifespan L80/B50 at 25 °C	100000 h
Lifespan L90/B10 at 25 °C	50000 h
Number of switching cycles	100000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	750 mA
ECG - Output ripple current	< 5 %
ECG - Length	110 mm

ECG - Width	75 mm
ECG - Height	25 mm
Recommended control gear	OTi DALI 50/220...240/1A4 NFC

Emergency lighting

Wattage in emergency operation mode	6 W
Luminous flux in emergency operation mode	700 lm

Certificates & Standards

Standards	CE / CB / ENEC / UKCA / EAC / EPD / EL
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	By the end consumer

Additional product data

Added function	VIVARES
----------------	---------

Accessories Optional

Product image	Product name	EAN
	DR DS-P- 32/220-240/750 PL FLEX 625	4058075843691
	PANEL 625 SURFACE MOUNT KIT H70 VAL	4058075402867
	PANEL 625 RECESSED MOUNT FRAME	4058075402904
	EM CONVERSION BOX	4058075237025
	PANEL Suspension Kit	4058075402928

Product image	Product name	EAN
	PANEL RECESSED MOUNT CLIPS VAL 4x	4058075409859
	OTi DALI 50/220...240/1A4 NFC	4062172061889

EQUIPMENT / ACCESSORIES

- Accessories for several mounting options available
- Connector box with 5-pole terminal included
- Security brackets preinstalled
- External control gear included
- Suitable for use with separate Emergency Conversion Box
- Serviceable luminaire: Upgrades and replacements available

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	PANEL FLEX
	Legal information	LSI PANEL FLEX
	Legal information	Legal Insert PL FLEX
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	EM Insert PL FLEX
	Declarations of conformity	PL FLEX
	Declarations of conformity UKCA	PL FLEX
Photometric and lighting design files		Document name
	IES file (IES)	PL FLEX DALI 625 S 32W 4000K U19 5220lm


Photometric and lighting design files		Document name
	LDT file (Eulumdat)	PL FLEX DALI 625 S 32W 4000K U19 5220lm
	ULD file (DIALux)	PL FLEX 625 DALI S 32W 840 U19
	ROLF file (RELUX)	PL FLEX 625 DALI S 32W 840 U19
	UGR file (UGR table)	PL FLEX DALI 625 S 32W 4000K U19 5220lm
	Light distribution curve type cone	PL FLEX DALI 625 S 32W 4000K U19 5220lm
	Light distribution curve type polar	PL FLEX DALI 625 S 32W 4000K U19 5220lm
CAD/BIM files		Document name
	BIM Revit 3D	PL FLEX
	CAD STEP 3D	PL FLEX 625

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854276798	Folding box 1	35 mm x 625 mm x 710 mm	2374.00 g	15.53 dm³
4099854276804	Shipping box 4	737 mm x 179 mm x 657 mm	10818.00 g	86.67 dm³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



DR D5-30-220-400/750

30V ~ 220V ~ 27V ~ 400V ~ 750V

DR D5-30-220-400/150

30V ~ 220V ~ 27V ~ 400V ~ 150V

PANEL, FLEX 01 / 021

DRIVER

PL FLEX DALI 625 S 32W 4000 K U19

5220lm / FLEX 01 (DR D5-30-220-400/750)

5220lm / FLEX 02 (DR D5-30-220-400/150)

5220lm / FLEX 03 (DR D5-30-220-400/150)

5220lm / FLEX 04 (DR D5-30-220-400/150)

5220lm / FLEX 05 (DR D5-30-220-400/150)

5220lm / FLEX 06 (DR D5-30-220-400/150)

5220lm / FLEX 07 (DR D5-30-220-400/150)

5220lm / FLEX 08 (DR D5-30-220-400/150)

5220lm / FLEX 09 (DR D5-30-220-400/150)

5220lm / FLEX 10 (DR D5-30-220-400/150)

5220lm / FLEX 11 (DR D5-30-220-400/150)

5220lm / FLEX 12 (DR D5-30-220-400/150)

5220lm / FLEX 13 (DR D5-30-220-400/150)

5220lm / FLEX 14 (DR D5-30-220-400/150)

5220lm / FLEX 15 (DR D5-30-220-400/150)

5220lm / FLEX 16 (DR D5-30-220-400/150)

5220lm / FLEX 17 (DR D5-30-220-400/150)

5220lm / FLEX 18 (DR D5-30-220-400/150)

5220lm / FLEX 19 (DR D5-30-220-400/150)

5220lm / FLEX 20 (DR D5-30-220-400/150)

5220lm / FLEX 21 (DR D5-30-220-400/150)

5220lm / FLEX 22 (DR D5-30-220-400/150)

5220lm / FLEX 23 (DR D5-30-220-400/150)

5220lm / FLEX 24 (DR D5-30-220-400/150)

5220lm / FLEX 25 (DR D5-30-220-400/150)

5220lm / FLEX 26 (DR D5-30-220-400/150)

5220lm / FLEX 27 (DR D5-30-220-400/150)

DR D5-30-220-400/750 PL FLEX 001

5220lm / FLEX 001 (DR D5-30-220-400/750)

5220lm / FLEX 002 (DR D5-30-220-400/150)

5220lm / FLEX 003 (DR D5-30-220-400/150)

5220lm / FLEX 004 (DR D5-30-220-400/150)

5220lm / FLEX 005 (DR D5-30-220-400/150)

5220lm / FLEX 006 (DR D5-30-220-400/150)

5220lm / FLEX 007 (DR D5-30-220-400/150)

5220lm / FLEX 008 (DR D5-30-220-400/150)

5220lm / FLEX 009 (DR D5-30-220-400/150)

5220lm / FLEX 010 (DR D5-30-220-400/150)

5220lm / FLEX 011 (DR D5-30-220-400/150)

5220lm / FLEX 012 (DR D5-30-220-400/150)

5220lm / FLEX 013 (DR D5-30-220-400/150)

5220lm / FLEX 014 (DR D5-30-220-400/150)

5220lm / FLEX 015 (DR D5-30-220-400/150)

5220lm / FLEX 016 (DR D5-30-220-400/150)

5220lm / FLEX 017 (DR D5-30-220-400/150)

5220lm / FLEX 018 (DR D5-30-220-400/150)

5220lm / FLEX 019 (DR D5-30-220-400/150)

5220lm / FLEX 020 (DR D5-30-220-400/150)

5220lm / FLEX 021 (DR D5-30-220-400/150)

5220lm / FLEX 022 (DR D5-30-220-400/150)

5220lm / FLEX 023 (DR D5-30-220-400/150)

5220lm / FLEX 024 (DR D5-30-220-400/150)

5220lm / FLEX 025 (DR D5-30-220-400/150)

5220lm / FLEX 026 (DR D5-30-220-400/150)

5220lm / FLEX 027 (DR D5-30-220-400/150)

W x H x D

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

W x H x D

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

W x H x D

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

DRIVER (DR D5-30-220-400/750) PL FLEX 001

5220lm / FLEX 001 (DR D5-30-220-400/750)

5220lm / FLEX 002 (DR D5-30-220-400/150)

5220lm / FLEX 003 (DR D5-30-220-400/150)

5220lm / FLEX 004 (DR D5-30-220-400/150)

5220lm / FLEX 005 (DR D5-30-220-400/150)

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.