

# PRODUCT DATASHEET

## SF BLKH 250 EM 10 W 3000 K BK IP65

SURFACE BULKHEAD 250 EMERGENCY | Robust wall and ceiling luminaire with IP65 protection and integrated emergency lighting function



### Areas of application

- Emergency illumination of escape routes
- Antipanic lighting
- Buildings requiring up to 3 h emergency light operation
- Direct replacement for luminaires with fluorescent lamps
- Corridors, stairways, entrance areas
- Passages, underpasses
- Public areas

### Product benefits

- Seamless integration of luminaires with emergency lighting function into general lighting
- Easy wiring thanks to included prewired driver and battery for Emergency lighting function
- Simple testing of luminaires with emergency lighting function thanks to integrated automatic test function
- Separate covers available for an aesthetic and functional product design
- 3 years guarantee
- High luminous efficacy in normal operation
- Convenient visualization of results of automatic test with an included control LED
- Operation of integrated emergency lighting function with long life LiFePO4 battery with 3h battery discharge time
- Suitable for use in dusty and damp locations thanks to high IP rating
- Suitable for use in public areas thanks to high IK rating
- Multiple mounting patterns for convenient installation
- Energy savings of up to 50 % (compared to luminaires that use fluorescent lamps)

### Product features



- Certified according to European norms (EN 60598-1:2015; EN 60598-2-22:2014)
- Luminaire suited for normal lighting and emergency lighting
- Self-contained luminaires
- Emergency lighting function: battery discharge time of 3 h
- Function test of emergency lighting: automatic (AT)
- Battery technology: LiFePO<sub>4</sub>
- Ambient temperature in operation: 5°...+40 C
- UV-stabilized polycarbonate (PC) housing, PC-diffuser
- Impact resistance: IK10
- Push wire terminal for tool-free connection
- Through-wiring possible
- Type of protection: IP65


---

**TECHNICAL DATA****Electrical data**


|                                                             |                       |
|-------------------------------------------------------------|-----------------------|
| Nominal wattage                                             | 10.20 W               |
| Nominal voltage                                             | 220...240 V           |
| Mains frequency                                             | 50...60 Hz            |
| Nominal current                                             | 350 mA                |
| Inrush current                                              | 4,52 A                |
| Inrush current time $T_{h50}$                               | 50 $\mu$ s            |
| Max. number of luminaires per miniature circuit breaker B16 | 94                    |
| Max. number of luminaires per miniature circuit breaker C10 | 75                    |
| Max. number of luminaires per miniature circuit breaker C16 | 120                   |
| Power factor $\lambda$                                      | $\geq 0.5$            |
| Total harmonic distortion                                   | < 10 %                |
| Protection class                                            | II                    |
| Operating mode                                              | Integrated LED driver |

**Photometrical data**

|                                              |                      |
|----------------------------------------------|----------------------|
| Luminous flux                                | 800 lm               |
| Luminous efficacy                            | 80 lm/W              |
| Color temperature                            | 3000 K               |
| Light color (designation)                    | Warm White           |
| Color rendering index Ra                     | > 80                 |
| Standard deviation of color matching         | < 5 sdc <sub>m</sub> |
| Low flicker                                  | Yes                  |
| Photobiological safety group acc. to EN62778 | RG0                  |
| Beam angle                                   | 120 °                |

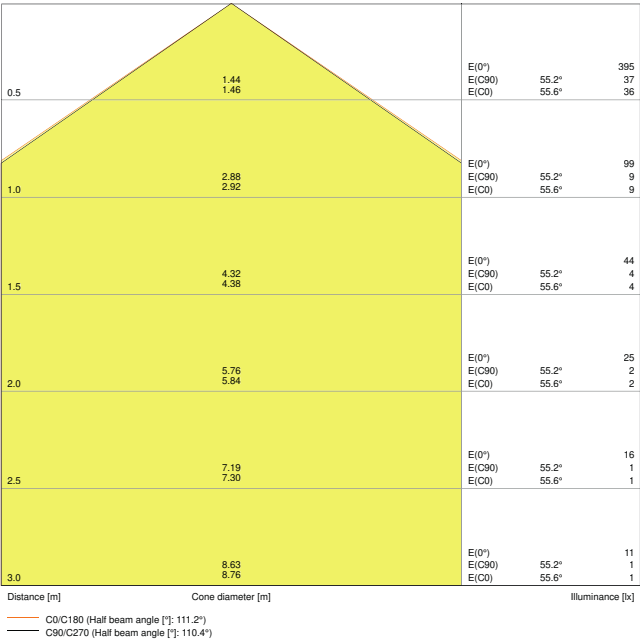


SF BLKH 250 10W3000K BK IP65 EM discharge LDT

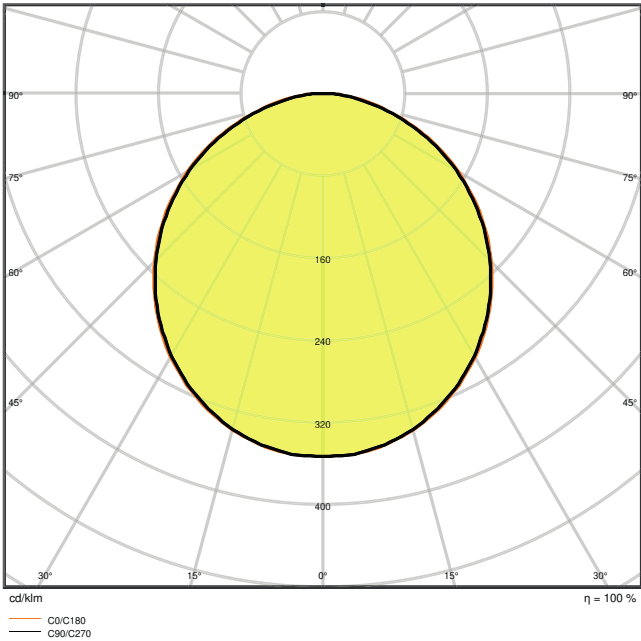

SF BLKH 250 10W3000K BK IP65 EM discharge LDT

Dimensions & Weight

|                |          |
|----------------|----------|
| Diameter       | 258 mm   |
| Height         | 70.00 mm |
| Product weight | 760.00 g |



Materials & Colors

|               |                    |
|---------------|--------------------|
| Product color | Black              |
| Housing color | Black              |
| Body material | Polycarbonate (PC) |

|                                            |                    |
|--------------------------------------------|--------------------|
| Cover material                             | Polycarbonate (PC) |
| Light emitting surface material            | Polycarbonate (PC) |
| Glow Wire Test according to IEC 60695-2-12 | 850 °C             |
| Mercury content                            | 0.0 mg             |

### Application & Mounting

|                                        |                    |
|----------------------------------------|--------------------|
| Ambient temperature range              | +5...+40 °C        |
| Temperature range at storage           | 5...+35 °C         |
| Type of connection                     | Screwless terminal |
| Type of protection                     | IP65               |
| Protection class IK (shock resistance) | IK10               |
| Dimmable                               | No                 |
| Mounting type                          | Surface            |
| Mounting location                      | Ceiling / Wall     |
| Application environment                | Indoor             |
| Replaceable light source               | No                 |

### Lifespan

|                            |                       |
|----------------------------|-----------------------|
| Lifespan L70/B50 at 25 °C  | 50000 h <sup>1)</sup> |
| Lifespan L80/B10 at 25 °C  | 35000 h <sup>1)</sup> |
| Lifespan L80/B50 at 25 °C  | 35000 h               |
| Lifespan L90/B10 at 25 °C  | 20000 h               |
| Number of switching cycles | 100000                |

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### BATTERY

|                             |          |
|-----------------------------|----------|
| Type of Battery             | LiFePO4  |
| Battery size [GMS]          | Others   |
| Nominal voltage of battery  | 3,2 V    |
| Nominal capacity of battery | 4500 mAh |
| Battery charging time       | < 24 h   |

### Emergency lighting

|                                   |                                             |
|-----------------------------------|---------------------------------------------|
| Area of emergency application     | Anti-panic lighting / Escape route lighting |
| Type of emergency light operation | Maintained / Non-maintained                 |
| Type of emergency operation test  | Automatic                                   |

|                                            |        |
|--------------------------------------------|--------|
| Wattage in maintained operation mode       | 10,2 W |
| Wattage in emergency operation mode        | 3,0 W  |
| Luminous flux in maintained operation mode | 800 lm |
| Luminous flux in emergency operation mode  | 300 lm |
| Battery life in emergency operation mode   | 3 h    |
| Integrated test switch                     | No     |

### Certificates & Standards

|                                  |                 |
|----------------------------------|-----------------|
| Standards                        | CE / CB         |
| Ball shot safe                   | No              |
| Replaceable light source (EPREL) | Not replaceable |

### Accessories Optional

| Product image                                                                       | Product name          | EAN           |
|-------------------------------------------------------------------------------------|-----------------------|---------------|
|    | SF BLKH EYELID 250 BK | 4058075375505 |
|  | SF BLKH RING 250 BK   | 4058075399358 |

### EQUIPMENT / ACCESSORIES

- Additional cover rings in different designs available
- Mounting screws and dowels included

### Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.

### DOWNLOAD DATA

| Documents and certificates                                                                                                | Document name              |
|---------------------------------------------------------------------------------------------------------------------------|----------------------------|
|  User instruction / safety instructions | SURFACE BULKHEAD EMERGENCY |



